

Single Soft Heat® Brewer with Docking System

Features

Coffee brewers with portable servers

- Brews 10.6 to 11.4 gallons (40.1 to 43.2 liters) of perfect coffee per hour.
- Brews ½, 1, or 1½ gallon (1.9, 3.8, 5.7 liter) batches.
- Patented server heat control automatically shuts off once target temperature is reached. Can be set to 175°F - 190°F (79.4°C - 87.8°C).
- Electronic grinder interface communicates to grinder on exact amount of coffee for selected brew batch size.
- Remote 1 or 2 server docking stations for additional satellite coffee serving.
- Safety-Fresh® patented brew-through lid with vapor seal and spill prevention.
- Variable batch selector knob lets you brew large batches or small servings.
- International electrical configurations available.



Model Single SH with 1.5 gallon SH Server*

(server sold separately)

Dimensions: 35.8" H x 9.3" W x 20.0" D
(90.9cm H x 23.6cm W x 50.8cm D)

For current specification sheets and other information, go to www.bunn.com.

*International models may vary in appearance.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004



Easy Clear® EDHP-10-L
Product No. : 39000.1001

Single/Dual Filter Pack
Product No. : 20138.0000
Packed per case: 500
Dimensions:
5¼" Base x 4¼" Sidewall
13.3 cm Base x 10.8 cm Sidewall



SH Server
Product No.: 27850.6001



1SH Stand
Product No.: 27825.6000

One Position Drip Tray
For use with Single/Single SH
Product No. : 26830.0000



One Position Drip Tray
For use with RWS1
Product No. : 20213.0200

Model

Single SH

Agency Listing



Dimensions & Specifications



Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
Single SH Brewer	27800.6001	120/208	18.6	3700	3900	10.6 gal/40.17 liter	9.3/.26	54 / 24.5	No
Single SH Brewer	27800.6002	120/240	17.5	4000	4200	11.4 gal/43.20 liter	9.3/.26	54 / 24.5	No
SH Server(1.5 gal.)	27850.6001	n/a	n/a	n/a	n/a	1.5 gal/5.68 liter	2.9/.08	18 / 8.2	No
1SH Stand	27825.6000	120	.75	n/a	90	Holds 1 SH Server	1.5 / .04	13 / 5.9	Yes
2SH Stand	27875.6000	120	1.5	n/a	180	Holds 2 SH Servers	2.5 / .07	22 / 10.0	Yes


Note: Soft Heat Brewers and Servers are boxed and shipped separately.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" (6.4 mm) male fitting.

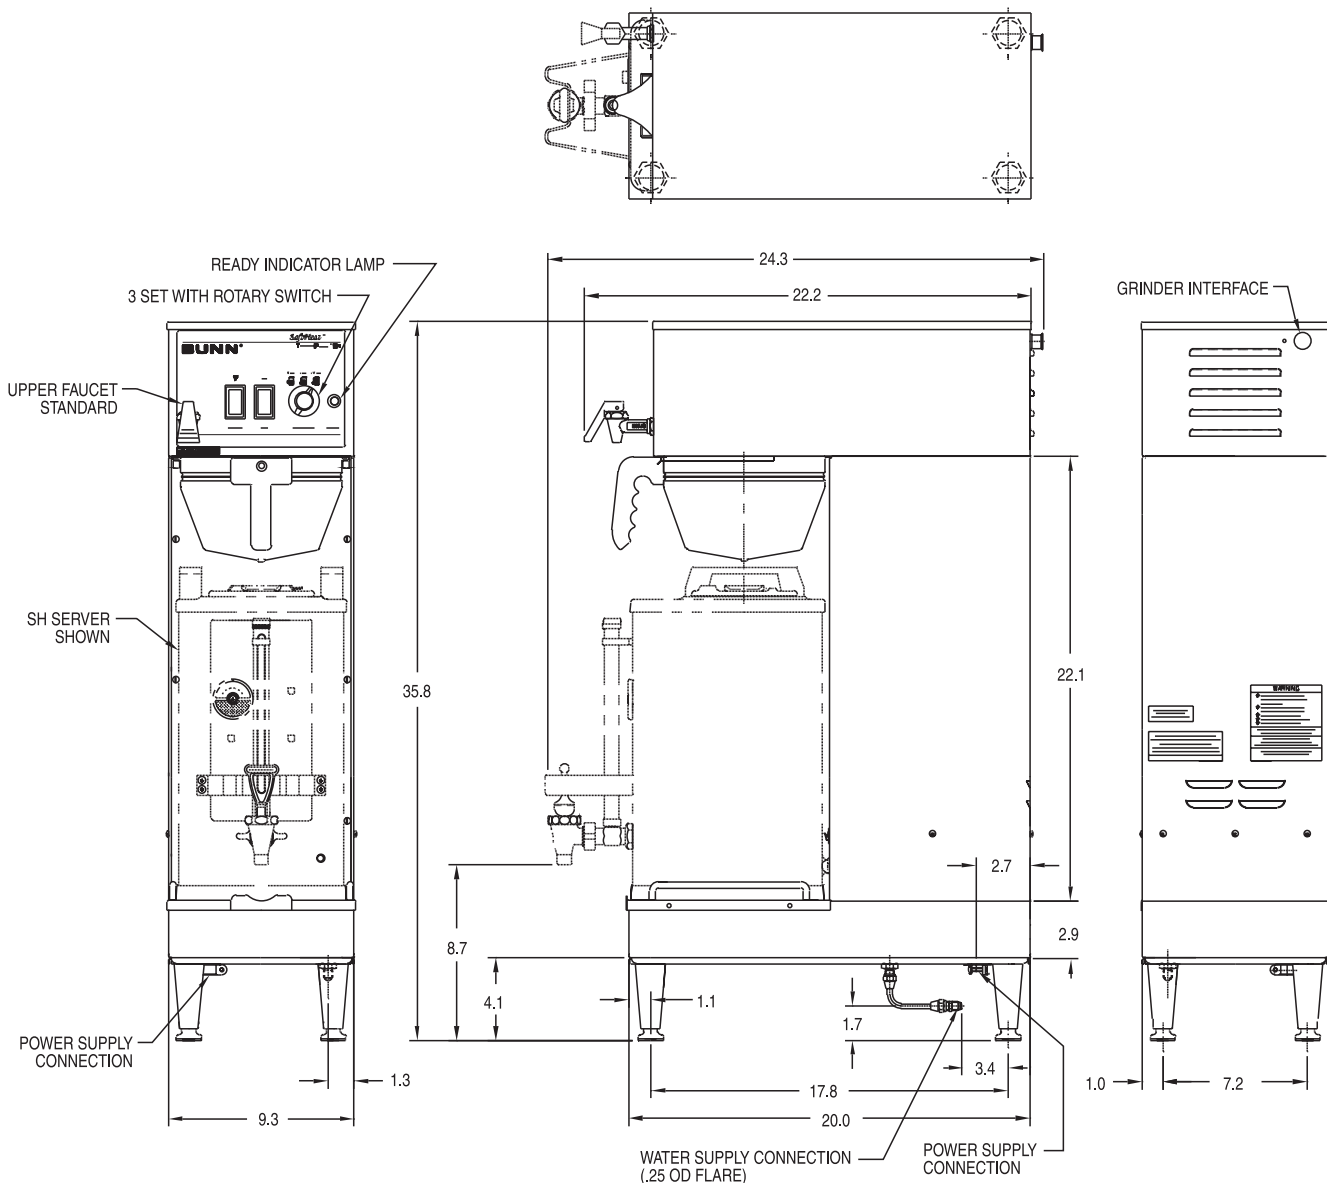

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.