

Pourover Coffee Brewer with 3 Warmers

ITEM#

PROJECT

DATE

Features

Low Profile Pourover Coffee Brewer

- Brews 3.8 gallons (14.4 liters) of perfect coffee per hour.
- Pourover brewer requires no plumbing – completely portable.
- All stainless steel construction.
- Stainless steel or black decor.
- Three separately controlled warmers.
- SplashGard® funnel deflects hot liquids away from the hand.
- International electrical configurations available.



Model VP17-3T SS

(decanters not included)

Dimensions: 18.9" H x 8.5" W x 17.7" D
(48cm H x 21.6cm W x 45cm D)



Model VP17-3 BLK

(decanters not included)

Dimensions: 17.8" H x 16.4" W x 17.7" D
(45.2cm H x 41.7cm W x 45cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Paper Filter Pack

Product No. : 20115.6000
Packed per case: 1,000
Dimensions:
4 1/4" Base x 2 3/4" Sidewall
10.8 cm Base x 6.98 cm Sidewall



WX1-warmer

Product No. : 06450.6000
One position warmer



Easy Pour® black decanter

Product No. : 06100.0201
Quantity: 1 (also packaged in quantities of 3, & 24)



WX2-warmer

Product No. : 06310.6000
Two position warmer



Easy Pour® orange decanter (for decaf)

Product No. : 06101.0101
Quantity: 1 (also packaged in quantities of 3, & 24)



B1-warmer

Product No. : 18000.6001
One position warmer
Black Finish



B2-warmer

Product No. : 18000.6002
Two position warmer
Black Finish



Model

Agency Listing

VP17-3 SST



VP17-3 BLK



Dimensions & Specifications

CANADA



Model	Product #	Volts	Amps	Heater Watts	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs. / kg.	Cord Attached
VP17-3 BLK (3 lwr)	13300.6004	120	12.5	1150	1500	3.8 gal/14.4 liter	6.9/0.2	36 lbs.(16.3 kg)	Yes*
VP17-3 SS (3 lwr)	13300.6005	120	12.5	1150	1500	3.8 gal/14.4 liter	6.9/0.2	36 lbs.(16.3 kg)	Yes*
VP17-3T BLK (2 up)	13300.6028	120	12.5	1150	1500	3.8 gal/14.4 liter	3.1/0.1	25 lbs.(11.4 kg)	Yes*
VP17-3T SS (2 up)*	13300.6011	120	12.5	1150	1500	3.8 gal/14.4 liter	3.1/0.1	25 lbs.(11.4 kg)	Yes*


*Power cord (NEMA 5-15P) 15 amp 120 V machine only. *Includes Stainless Steel Funnel

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.


Electrical: Models require 2-wires plus ground service rated 120V, single phase, 60 Hz.

Plumbing: No plumbing required.

2 Upper Warmers

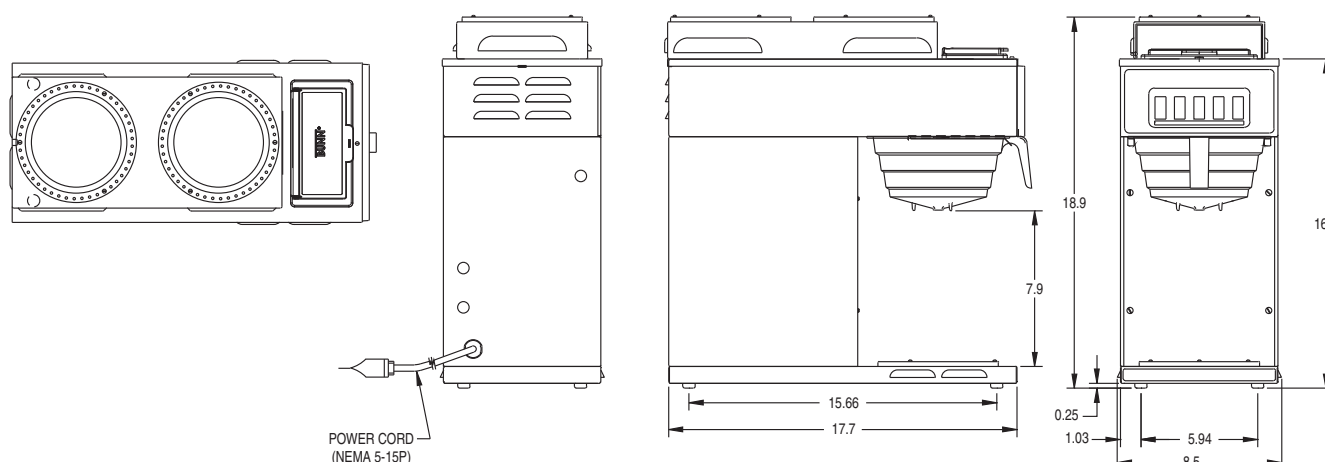

3 Lower Warmers

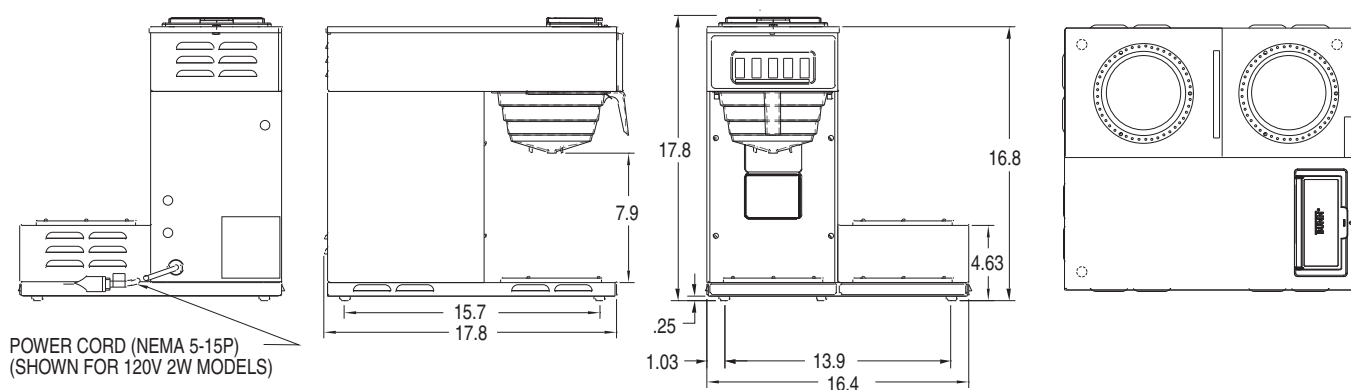

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.