

G4 GemX™ IntelliFresh® Coffee Brewer

With FreshTrac® Satellite



G4GEMXSIFT63A1000

G4 Gemini IntelliFresh Single Coffee Brewer with FreshTrac Satellite



G4GEMXTIFT10A1000

G4 Gemini IntelliFresh Twin Coffee Brewer with FreshTrac Satellites

GemX IntelliFresh® Brewer Features

LED notification of freshness timing.

Gold Cup Series™ – digital control module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion to pulse-brewing to water bypass.

Preset, one-touch Global Recipes – Based on coffee type, grind and weight. Simplifies profile setting for gourmet results every time.

Patented fast-wetting AFS spray head and non-immersed water temperature sensor.

Encapsulated control board – Protects against steam, water and impact.

Field selectable for 0.5, 1.0 or 1.5 gal. batch brewing.

New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

GemX Satellite Features


Easy Maintenance – Smart, water-tolerant design.

Intuitive FreshTrac LED System – Communicates freshness and volume at a distance – no distracting alarms.



Satellite Bottom Sloping Design – Allows full evacuation. Easy to empty and clean.

User Selectable LED Colors – Green, White, Yellow or Red. Select “fresh” color and a 2nd color for “Quality Expired.”

- **COLOR 1** – Flashes During Brew Cycle
- **COLOR 1** – Solid ON Indicates “Fresh”; programmable from 20 to 230 min.
- **COLOR 2** – Flashes to indicate “Quality Expired”. Continuous for up to 18 hours.
- **SOLID BLUE** – Indicates volume after warmer is OFF; Warmer turns off automatically after 18 hours from start of brew cycle. No light indicates satellite is empty.

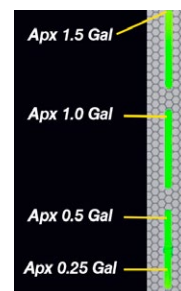

G4 GemX™ IntelliFresh® Coffee Brewer

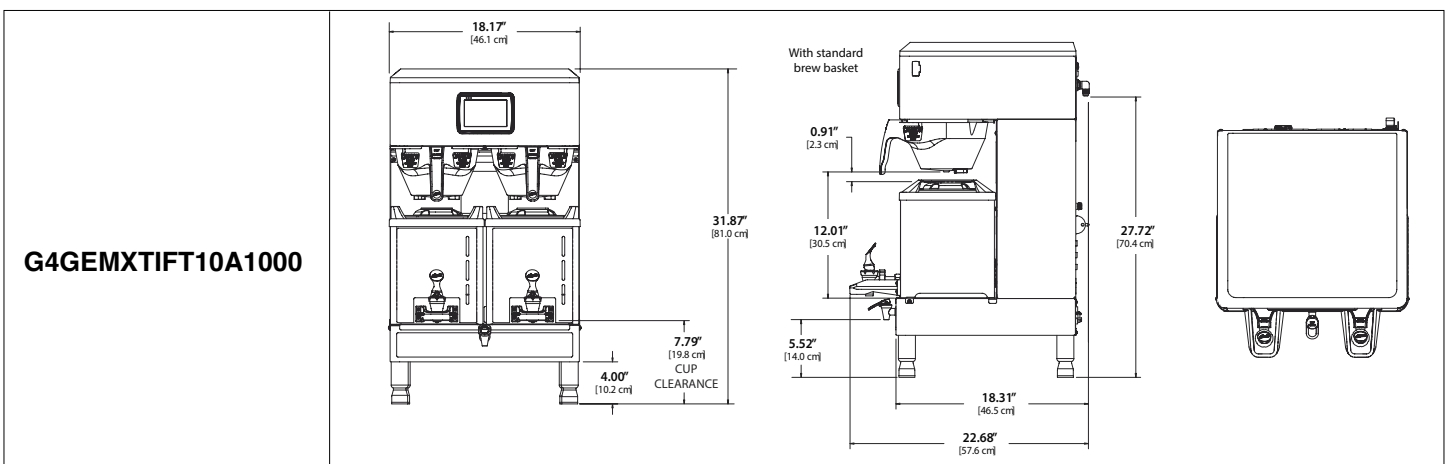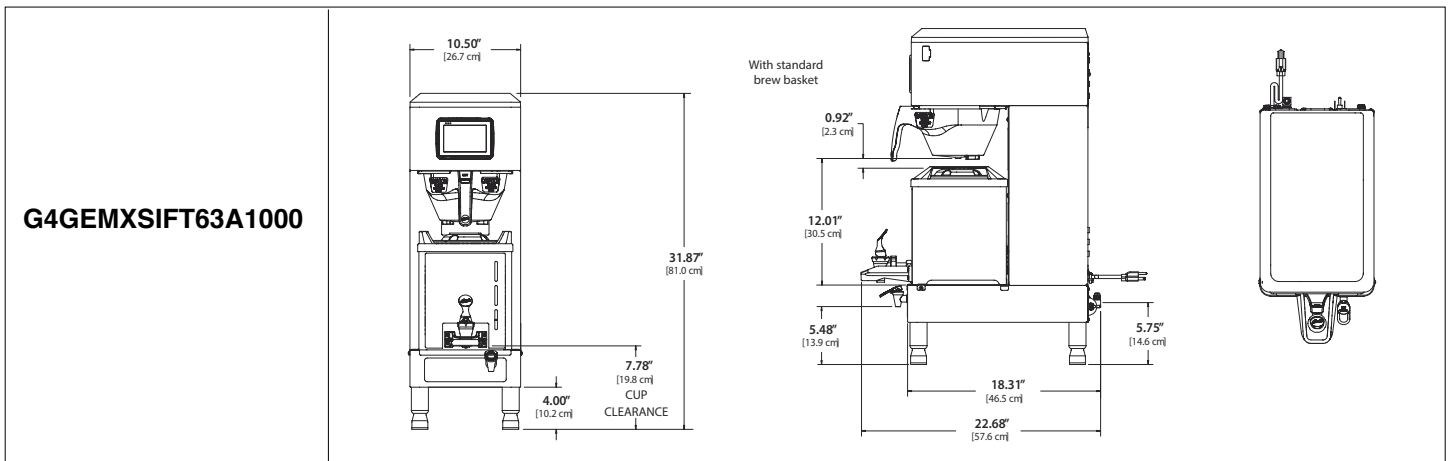

Dimensions

MODEL#	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWED FILL WEIGHT	BREWED L/HR
G4GEMXSIFT63A1000	Single, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 10.50" x 22.68"	68.4 lbs.	4.5/10.0
G4GEMXTIFT10A1000	Twin, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 18.17" x 22.69"	128.4 lbs.	15.0/21.0

Utility Requirements

MODEL#	PHASE	VOLTS	AMPS	ELECTRICAL				WATER			
				HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MINIMUM FLOW RATE	TANK VOL.
G4GEMXSIFT63A1000	1 PH	120/220V	13.5/13.5A	2 X 1600W	2W/3W + G	1650/2800W	50/60Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal
G4GEMXTIFT10A1000	1 PH	220V	23.0/34.0A	3 X 2500W	3W + G	5100/7500W	50/60Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov